



# GV Natural

## USES

- ▶ General Landscape
- ▶ Lawns
- ▶ Pet Areas
- ▶ Roof Decks
- ▶ Medians
- ▶ Multi-Use Activity Areas




15 Year Manufacturer's Warranty

8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

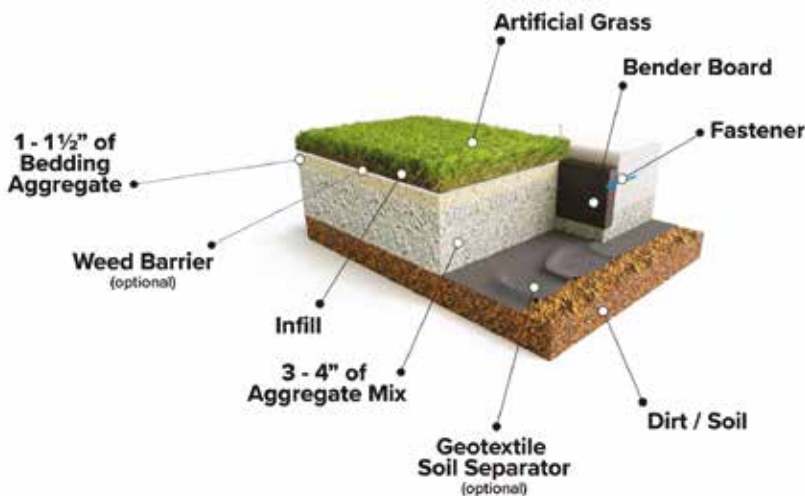

## SPECIFICATIONS



Pile Height: 1½"

Turf Gauge: ½"

Face Weight: 48 oz./ yd<sup>2</sup>

Backing Weight: 26 oz./yd<sup>2</sup>

Total Weight: 74 oz./yd<sup>2</sup>

Stitch Rate: 13/10 cm

Stitches/m<sup>2</sup>: 13,650

Material/Dtex: PE & PP 14,400

Color: Field, Apple Face Fiber with Green and Tan Thatch

Type Of Fiber: PE Monofilament and PP Curled As Thatch

Infill Amount: 2.0 lb./psf.

Primary Backing: Premium AST Backing

Tuft Bind: 15.3 lbs/force (ASTM D1335)

Permeability: 122.3 inches/hr. (ASTM F1551)

Melting Point: 150° F (ASTM D2859)

Grab Tear MD: 229.0 lbs/force (ASTM D5034)

Grab Tear CMD: 285.7 lbs/force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1,500

Total Roll Weight: 785 lbs