



GV Pet

USES

- ▶ General Landscape
- ▶ Lawns
- ▶ Pet Areas
- ▶ Roof Decks
- ▶ Medians
- ▶ Commercial or Residential




15 Year Manufacturer's Warranty

8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

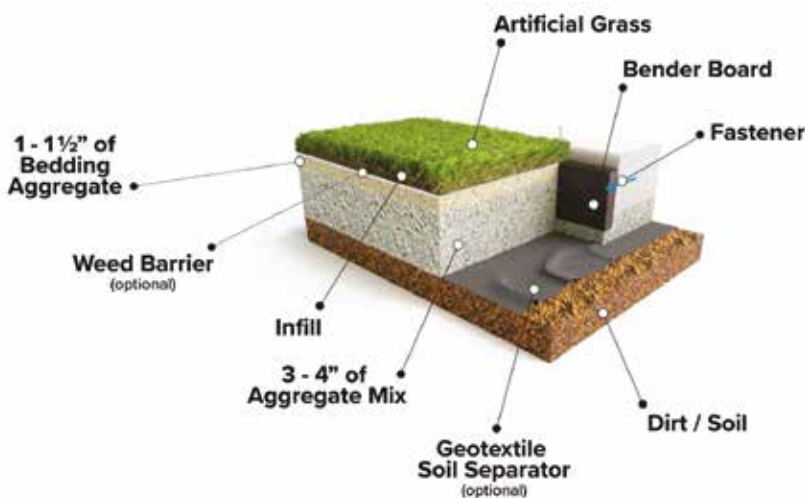

SPECIFICATIONS



Pile Height: 1½"

Turf Gauge: ⅜"

Face Weight: 50 oz./ yd²

Backing Weight: 26 oz./yd²

Total Weight: 76 oz./yd²

Stitch Rate: 16/10 cm

Stitches/m²: 16,800

Material/Dtex: PE 11,000 + PP 3500

Color: Emerald Green and Olive Green with Brown and Green Thatching

Type Of Fiber: PE Monofilament and PP Curled Thatch

Infill Amount: 1.0 lb./psf.

Primary Backing: Premium GST Backing

Tuft Bind: 17+ lbs/force (ASTM D1335)

Blade Type: U-Blade

Permeability: 121.4 inches/hr. (ASTM F1551)

Melting Point: 176 °F (ASTM D2859)

Grab Tear MD: > 200 lbs/force (ASTM D5034)

Grab Tear CMD: > 200 lbs/force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 845 lbs